



SYNERGY

INNOVATIVE DIVING EQUIPMENT TRADING LLC

INSPIRING • ENGINEERING • INNOVATION

UAE • UK • INDIA • AZERBAIJAN



For more detailed technical data sheets mail us on ram@synergyequipment.com

CONTAINERIZED DIVE SUPPORT MACHINERY CONTROL UNIT SY-MC-CUSTOM-7



CONTAINERIZED DIVE SUPPORT MACHINERY CONTROL UNIT SY-MC-CUSTOM-




HIGH PRESSURE COMPRESSOR BAUER SY-MARINER 320E



TWIN HYDRAULIC POWER PACK



DIVER BREATHING AIR QUAD SY-DBA

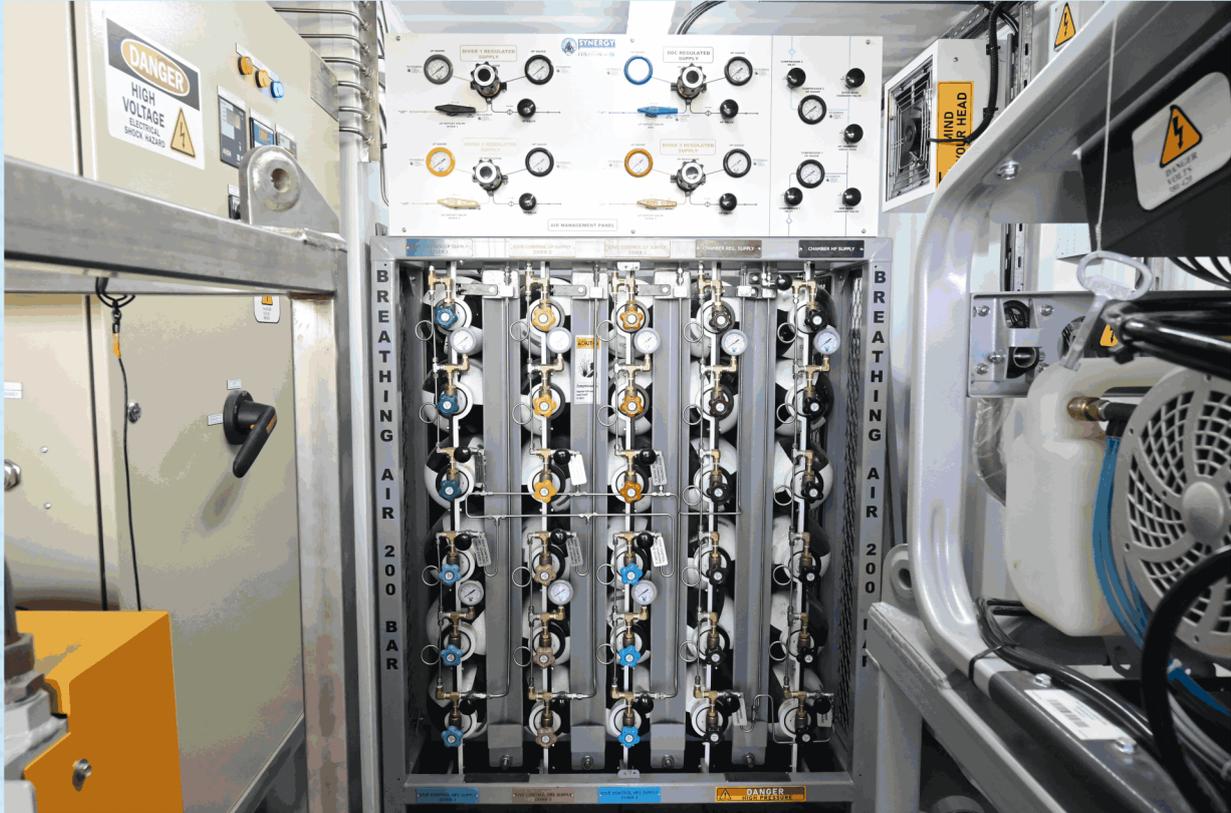

CHANGE OVER SWITCH





INSPIRING • ENGINEERING • INNOVATION

UAE • UK • INDIA • AZERBAIJAN

CERTIFICATES PROVIDED WITH EACH MACHINERY CONTAINER

Container	Dnv offshore container certs / Iso container certs
Lifting Slings	Dnv or BV certified slings
Class	Bureau Veritas pressure test witness for entire system
Bauer compressor	Function /pressure/air purity test
Hp cylinder quad	Hydrotest
Gas Management Panel	Bureau Veritas pressure test witness
Imca	D018 / D023
Fmea	As built by Synergy
Fmea stamped by class	As built by Synergy and reviewed by Class (optional)
Warranty	One year Synergy manufacturing warranty

Industry & Facilities Division
Third Party Inspection Report
Page 1 of 7

INSPECTION REPORT: 03 Revision Nr-0

Initial Interim Final Resident

Inspection requested by: Synergy Diving Equipment Solutions FZC

Inspection performed by: Bureau Veritas

BV Job No: DQA-4-17-899

Project: Third Party Inspection Service

BV Client: Synergy Diving Equipment Solutions FZC

Manufacturer/Vendor: Synergy Diving Equipment Solutions FZC

Inspection Location: Synergy Diving Equipment Solutions FZC (Division label workshop)

Inspection performed on: 05.10.2017

Item / TAG No: HP Compressor & Management Panel

QTY As per P/O: 1

QTY Ordered for inspection: 1

Witness Present: Test of HP LP Compressor & Management Panel (Cylinder air bank & distribution panel to the working pressure)

A - INSPECTION RESULT

Satisfactory (Without comments) Satisfactory with comments (Any of testing Plan or Non Conformity items is still open) Not Satisfactory (NCI raised during the inspection)

Inspection Summary: 1. Witness Pneumatic Test of HP & LP Compressor & Management Panel. Cylinder air bank & distribution panel to the working pressure & found satisfactory.

Open Punch List Items: Yes, details in section D No

Release Note Issued: Yes, number(s) No

BP Stamping: Yes No

On behalf of Bureau Veritas
BV Inspector: Debasis Mandal

On behalf of Synergy Diving Equipment Solutions FZC
BV Coordinator: Akshay Patel

BV Office: Dubai

Inspection Report Date: 05.10.2017

GM-SI-101 INSP002-En Version 5.0 Copyright Bureau Veritas 05/2017

Industry & Facilities Division
Third Party Inspection Report
Page 2 of 7

INSPECTION REPORT Nr-03 Revision Nr-0

Distribution: CLIENT BV MANUFACTURER OTHER

Attachments Report: Yes, details in section J No

B - REFERENCE DOCUMENTATION:

Title	Reference n°	Rev.	Approval status	Approved by	Date
Diving Equipment System Inspection Guidelines	IMCA D023			Synergy	

C - ATTENDEES

Name	Position	Representing
Debasis Mandal	Inspector	Bureau Veritas
Mr. Manager A	Director	Synergy
Body Legend	Technical Manager	Synergy

D - MEASURING & TESTING EQUIPMENT USED

Equipment Type	Equipment Identity n°	Last Calibration Date	Expiry Date
Pressure Gauge	544-65	17.08.2017	16.08.2018

E - INSPECTION DETAILS

Description of the inspections carried out:

- Visual inspection HP & LP Compressor & Management Panel, Cylinder air bank & distribution panel and found satisfactory.
- Witness Inspection HP & LP Compressor & Management Panel, Cylinder air bank & distribution panel as per Annexure-1 & found satisfactory.
- Observation of Certificate for the working pressure test on the cylinder air bank & operations as per Annexure-1.
- Verify calibration certificate of measuring instrument and found satisfactory.

GM-SI-101 INSP002-En Version 5.0 Copyright Bureau Veritas 05/2017

Industry & Facilities Division
Third Party Inspection Report
Page 4 of 7

INSPECTION REPORT Nr-03 Revision Nr-0

F - DIGITAL PICTURES

GM-SI-101 INSP002-En Version 5.0 Copyright Bureau Veritas 05/2017

Industry & Facilities Division
Third Party Inspection Report
Page 6 of 7

INSPECTION REPORT Nr-03 Revision Nr-0

J - ATTACHMENTS

Item	Attachment Name	Total Pages	Description

Annexure-1

Inspection Details

- BV has been witnessed Pneumatic working pressure test of HP & LP compressor, Distribution Panel with the following Details.

MACHINERY CONTAINER SERIAL NUMBER: 5533753

PRESSURE TEST OF HP COMPRESSOR:

MANUFACTURER:	BAUER KOMPRESSOREN
MODEL:	PE350-VE-F03
SERIAL NO.:	17-16 1899
MAX. WORKING PRESSURE:	200 BAR

PRESSURE TEST OF LP COMPRESSOR:

MANUFACTURER:	BAUER KOMPRESSOREN
MODEL:	PE350-VE-F03
SERIAL NO.:	17-16 1700
MAX. WORKING PRESSURE:	200 BAR

PRESSURE TEST OF LP COMPRESSOR:

MANUFACTURER:	QUINCY COMPRESSOR
MODEL:	BM 31205B
SERIAL NO.:	UTZ 201503
VOLUME TANK SERIAL NO.:	376288 and 376285
MAX. WORKING PRESSURE:	200 PSI

GM-SI-101 INSP002-En Version 5.0 Copyright Bureau Veritas 05/2017

Industry & Facilities Division
Third Party Inspection Report
Page 7 of 7

INSPECTION REPORT Nr-03 Revision Nr-0

PRESSURE TEST OF MANAGEMENT PANEL:

MANUFACTURER:	SYNERGY DIVING AND EQUIPMENT SOLUTION FZC
SERIAL NO.:	POSEIDON 001
MAX. WORKING PRESSURE (LP):	250 PSI
MAX. WORKING PRESSURE (HP):	3000 PSI

PRESSURE TEST OF DISTRIBUTION PANEL:

MANUFACTURER:	SYNERGY DIVING AND EQUIPMENT SOLUTION FZC
SERIAL NO.:	POSEIDON 002
MAX. WORKING PRESSURE (LP):	250 PSI
MAX. WORKING PRESSURE (HP):	3000 PSI

PRESSURE TEST OF 12 X 50 LBS CYLINDER AIR BANK:

MANUFACTURER:	SYNERGY DIVING AND EQUIPMENT SOLUTION FZC
SERIAL NO.:	BA BACK NO. 099
MAX. WORKING PRESSURE:	3000 PSI

PRESSURE TEST OF 12 X 50 LBS CYLINDER AIR BANK:

MANUFACTURER:	SYNERGY DIVING AND EQUIPMENT SOLUTION FZC
SERIAL NO.:	BA BACK NO. 100
MAX. WORKING PRESSURE:	3000 PSI

• ALL PIPEWORKS AND VALVES OF THE MACHINERY CONTAINER HAVE BEEN TESTED TO MAXIMUM WORKING PRESSURE (LPH/HP) FOR 30 MINUTES. NO LEAKS FOUND.

END OF REPORT

GM-SI-101 INSP002-En Version 5.0 Copyright Bureau Veritas 05/2017



ORDERING INFORMATION

s/l	Part Number	Description
1	SY-MC-DNV-01-CUSTOM-7	DNV OFFSHORE MACHINERY CONTAINER WITHOUT INSULATION 2 X HP COMPRESSOR, 30 X CYLINDER DIVER BREATHING AIR QUAD, TWIN TYPE HYDRAULIC POWER PACK, CHANGE OVER SWITCH 12 X CYLINDER MEDICAL OXYGEN QUAD (RECESSED FROM OUTSIDE INTO THE CONTAINER)
2	SY-MC-DNV-02-CUSTOM-6	DNV OFFSHORE MACHINERY CONTAINER WITH INSULATION & AC 2 X HP COMPRESSOR, 30 X CYLINDER DIVER BREATHING AIR QUAD, TWIN TYPE HYDRAULIC POWER PACK, CHANGE OVER SWITCH, CABIN FOR TECHNICIAN, 12 X CYLINDER MEDICAL OXYGEN QUAD (RECESSED FROM OUTSIDE CONTAINER)

s/l	Part Number	Description
1	SY-MC-ISO-01-CUSTOM-3	ISO OFFSHORE MACHINERY CONTAINER WITHOUT INSULATION 1 X HP COMPRESSOR, 12 X CYLINDER DIVER BREATHING AIR QUAD, 12 X CYLINDER CHAMBER AIR QUAD, 12 X CYLINDER MEDICAL OXYGEN QUAD (RECESSED FROM OUTSIDE INTO THE CONTAINER)
2	SY-MC-ISO-02-CUSTOM-3	ISO OFFSHORE MACHINERY CONTAINER WITH INSULATION & AC 1 X HP COMPRESSOR, 12 X CYLINDER DIVER BREATHING AIR QUAD, 12 X CYLINDER CHAMBER AIR QUAD, 12 X CYLINDER MEDICAL OXYGEN QUAD (RECESSED FROM OUTSIDE INTO THE CONTAINER)

BESPOKE DESIGNS – ANY CONFIGURATION AS PER CLIENT REQUIREMENT

SYNERGY INFRASTRUCTURE





SYNERGY

INNOVATIVE DIVING EQUIPMENT TRADING LLC

INSPIRING • ENGINEERING • INNOVATION

UAE • UK • INDIA • AZERBAIJAN

CONTAINERIZED DIVE SUPPORT MACHINERY CONTROL UNIT SY-MC-CUSTOM-7

Contact us



Synergy Innovative Diving Equipment Trading LLC

P.O. Box: 237849, Warehouse No.242, 29th street, Behind Al Huraiz Est, For Industry, Al Qusais, Industrial Area - 1, Dubai - U.A.E

+9714 2580533 / +971 50 564 8178
ram@synergyequipment.com
www.synergyequipment.com



Synergy Diving & Oilfield Equipments Trading LLC

P.O. Box: 2419, Office: 216, 2nd Floor, Dar Al Salaam Building Hamdan Street, Abu Dhabi - U.A.E

+971 50 564 8178 / +971 54 460 1492
ram@synergyequipment.com
unilok@synergyequipment.com
www.synergyequipment.com



iSubC Diving Equipment Ltd

Units 10 Holly Close, Whitehills Business Park Westby With Plumpton, Blackpool, FY4 5QP, United Kingdom

+44 1253 767 788 / + 44 7951 966 260
info@isubc.com
www.isubc.com



Synergy Viking Offshore Engineering

Rabale Ttc Industrial Area Road no 20, Near Narayan dairy, Navi Mumbai, Thane - 400701, Maharashtra, India

+91 98218 90129
ram@synergyequipment.com
www.synergyviking.com



Synergy Group Azerbaijan

Gasaniyev, 14A
Baku
Azerbaijan

+99470 330 35 20
infoazerbajian@synergyequipment.com
www.synergyazerbajian.com

