

INTERSPIRO DIVATOR MASK SY-AGA-MKII



PART NO : SY-96319-04


Gray natural rubber mask with safety pressure



The DIVATOR Full Face Mask consists of a balanced breathing valve with high air flow capacity and low breathing resistance. The DIVATOR Breathing Valve is available without safety pressure, and with safety pressure for diving in contaminated water.

Specially-designed visor gives divers excellent field of vision while reducing positive buoyancy. The full face mask can be equipped with the DIVATOR Heads-Up Display (HUD) low air warning and the DIVATOR Hatch, an ambient breathing valve enabling divers to keep the face mask donned while on stand-by.

- 1 The balanced DIVATOR breathing valve is one of the best-tested breathing valves available. It will perform even in the most extreme of conditions: mud, oil, and fast flowing cold currents does not have a serious impact on the performance.
- 2 The low volume visor reduce the positive buoyancy generated from air inside the mask. Low volume "dead space" reduces re-inhalation of CO2.
- 3 The DIVATOR Full Face Mask is very easy to drain from water inside the mask, simply press the purge button and hold the mask against the face.
- 4 The mask is equipped with retainers spectacle inserts and it is prepared for underwater communication. The communication capabilities are enhanced by the airflow design that considerably reduces turbulence noise.

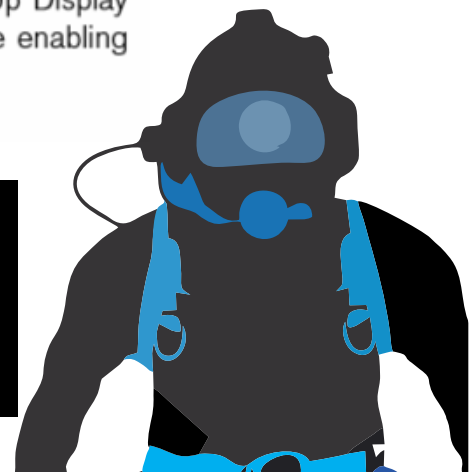

INTERSPIRO DIVATOR MASK SY-AGA-MKII

Breathing Valve for Full Face Mask

	Part No.	Description
	336101149	Black with safety pressure
	336101150	Black without safety pressure

Octopus Breathing Valve

	Part No.	Description
	97199-02	Complete with yellow shield ring and locking lever, without safety pressure.

Breathing Valve with Mouthpiece (for autonomous diving)

	Part No.	Description
	97199-01	Black breathing valve with mouthpiece, without safety pressure.


Mouthpiece

	Part No.	Description
	336190353	Complete mouthpiece kit, for conversion of breathing valve, without safety pressure.


Mask Visor Weights

	Part No.	Description
	336190854	Mask visor weights, complete, pair (2 x 350 gram)

Mask Cover

	Part No.	Description
	460190555	Black front cover lid for the Full Face Mask.

Spectacle Kit

	Part No.	Description
	96496-51	For mounting of prescription lenses inside the full face mask (lenses not included)

Pressure Equalizing Pad




	Part No.	Description
	88542-51	Pressure equalizing pad, four slots, EPDM rubber

Head Harness

The head harness is made in one piece of natural rubber.

	Part No.	Description
	460190457	Head harness, black natural rubber

Mask Bag

	Part No.	Description
	96484-51	Mask storage bag
	96484-52	Mask storage bag with ID holder
	331950280	Mask bag with handle

MASK VISOR WEIGHTS

The DIVATOR Mask Visor Weights can be attached to the Full Face Mask in order to compensate the mask's buoyancy.

When diving for prolonged periods of time, using visor weights is recommended practice.

Can not be used together with a hatch.



PORTABLE SINGLE DIVER VIDEO SYSTEM WITH COMMUNICATION SY-DIVER-VISION-1D-R

Mechanical	Specification
Weight	6 oz (.2kg) Dry, 3 oz(.06kg) wet
Depth Rating	2000 ft (600m)
Housing	Black delrin
Electrical	
Image Device	1/3" CCD sensor (412k pixel)
Sensitivity	.001 lux @f1.4
Resolution	600 TV lines standard
Video Out	1.2 Vpp
Power	12 VDC @ 110 ma.
Optical	
Lens	3.6mm, Electronic-Iris
Focus	Fixed 4" to infinity
Angle of View	70 horz. (in water)

PART NO : SY-UWC-325/p/e



PART NO : SY-UWL-401

Mechanical	Specification
Weight	7oz(0.2kg) Dry, 3 oz.(.1kg) Wet
Depth Rating	2000 ft (600m)
Housing	6061-16 Anodized Aluminium
Electrical	
Power	12 VDC @ 110 ma.
Wattage	18 watt (Eq to 150 watt halogen)
Output	700 lux at 1 meter
Optical	
Lens	3.6mm, Electronic-Iris
Focus	Fixed 4" to infinity
Angle of View	70 horz. (in water)



PART NO : SY-MKII-CLH

PORTABLE SINGLE DIVER VIDEO SYSTEM WITH COMMUNICATION SY-DIVER-VISION-1D-R

Communication set for Aga Mask

PART NO : SY-1406A



Low pressure bail out whip, 1 mtr

PART NO : SY-AGALPWHIP-1M

PORTABLE SINGLE DIVER VIDEO SYSTEM WITH COMMUNICATION SY-DIVER-VISION-1D-R

PART NO : SY-RMK-5-FS

Connector	RMK-5-FS
Type	5 Female Sockets
Cable	18 in Pigtail of 18 SO AWG Cable
Material	Special Neoprene, Molded
Contacts	Copper Alloy, Hard Gold Plated per ASTM-B-488
Voltage Rating	600 VDC
Pressure Rating, Mated	Up to 20,000 psi
Mates with	XSL-5-BCL on Outland Camera UWC-325/p/e



Locking sleeve for Rmk-5-fs

PART NO : SY-K-FLS-D

PART NO : SY-RMG-3FS



Locking sleeve for Rmg-3-fs

PART NO : SY-G-FLS-D

Connector	RMG-3-FS
Type	3 Female Sockets
Cable	18 in Pigtail of 18 SO AWG Cable
Material	Special Neoprene, Molded
Contacts	Copper Alloy, Hard Gold Plated per ASTM-B-488
Voltage Rating	600 VDC
Pressure Rating, Mated	Up to 20,000 psi
Mates with	XSG-3-BCL on Outland light UWL-401

Certifications	Provided with each system
International	IMCA D0 23
Manufacturer	Synergy Certificates
Electrical	Continuity/Function test



PART NO : SY-MS3108B-18-08P

Cannon Right Angle Amphenol Connector is used for connecting the video camera umbilical to the surface video console unit.

INTERSPIRO DIVATOR MASK SY-AGA-MKII

Contact us



29th Street, Amman Road, Behind Al Huraiz Est. For Industry,
Al Qusais, Industrial Area - 1,
Dubai, United Arab Emirates



Tel : 009714 2580533 



Fax : 042516664 



UAE : 00971505648178 



UK : 00447951966260 



Website : www.synergiequipment.com



Email : ram@synergiequipment.com



For Sale : info@synergiequipment.com

