

FIBROLITE AIR/MIX GAS DIVE UMBILICAL




SYNERGY
INNOVATIVE DIVING EQUIPMENT TRADING LLC

INSPIRING • ENGINEERING • INNOVATION

Fibrolite Air Dive Umbilical

DSLS002

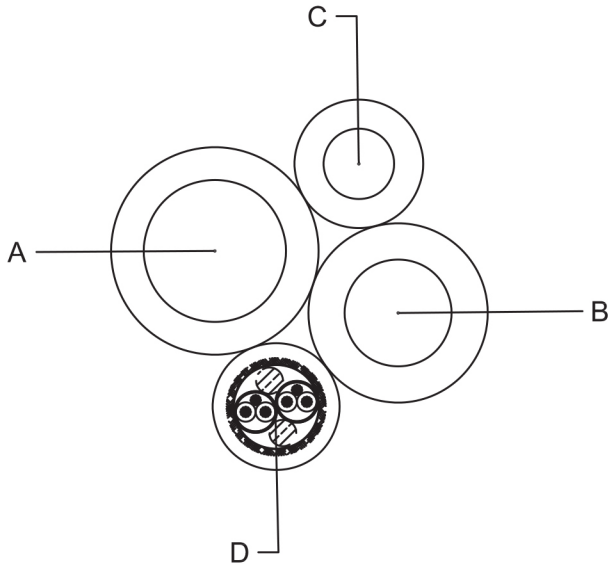

Assembly Detail:-

- A) 1 off FLT08 1/2" NB Fibrolite hot water hose.
Colour: Red.
- B) 1 off FLT06/R 3/8" NB Fibrolite gas hose.
Colour: Blue.
- C) 1 off FLT04 1/4" NB Fibrolite pneumo hose.
Colour: Yellow.
- D) 1 off DCS0001 two pair comm's cable.
Colour: Red.





Weights, dimensions & mechanical characteristics

Finished diameter:	34.0	mm ± 3.0 mm.
Weight in air:	660	kg/km.
Weight in sea-water:	-50	kg/km, (note 1).
Minimum bend radius:	220	mm, (static).
Minimum bend radius:	330	mm, (dynamic).

Note 1) Assumed sea-water density = 1,026 kg/m³.





Call Us

  0044 795 196 6260
  00971 50 564 8178

Email Us

 ram@synergyequipment.com
 info@synergyequipment.com

Visit Us

 Al Qusais Industrial Area 1, Dubai.
 www.synergyequipment.com