

FIBRON MINI TV CABLE




SYNERGY
INNOVATIVE DIVING EQUIPMENT TRADING LLC

INSPIRING • ENGINEERING • INNOVATION

UAE • UK • INDIA • AZERBAIJAN • SINGAPORE

Fibron Mini TV Cable

DCS0005

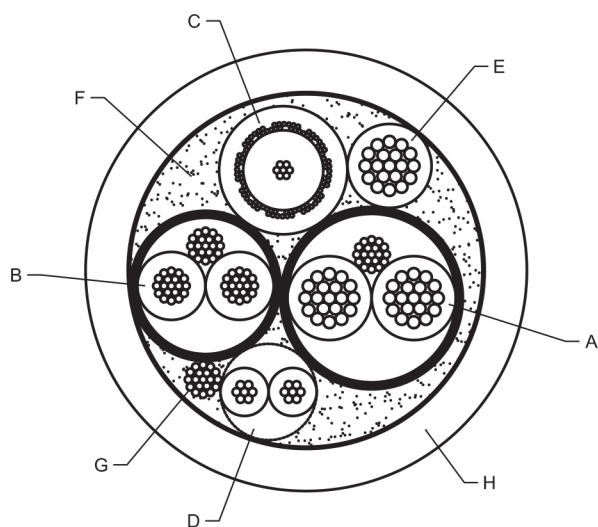


Assembly Detail:

- A) 1 off 1.34 mm² screened twisted pair.
- B) 1 off 0.50 mm² screened twisted pair.
- STP screens comprise polyester/aluminium laminate tape and tinned copper drain wire.
- C) 1 off miniature 75 ohm co-axial pair.
- D) 1 off 0.22 mm² twisted pair.
- E) 1 off 1.34 mm² single core.
- F) Assembly voids filled with cured rubber compound.
- G) Overall screen comprising polyester/aluminium laminate taped and tinned copper drain wire.
- H) Polyurethane sheath (1.4 mm nominal thickness).

Weights, dimensions & mechanical characteristics

Finished diameter:	11.0 mm
Weight in air:	165 kg/km
Weight in sea-water:	72 kg/km 1)
Minimum static bend radius:	70 mm
Minimum dynamic bend radius:	105 mm

1) Assumes sea-water density = 1,026 kg/m³.



IEC Colour abbreviations:

- BU: Blue
- BN: Brown
- GY: Grey
- YE: Yellow
- GN: Green



Call Us

0044 795 196 6260
 00971 50 564 8178

Email Us

ram@synergiequipment.com
 info@synergiequipment.com

Visit Us

Al Qusais Industrial Area 1, Dubai.
 www.synergiequipment.com